

# **PRODUCT RANGE**

Angle Grinders



**CPAG 4-720W** 



**CPAG 4-750W** 



CAG 100-850W



CPAG 4-850W



CPAG 4-1200W



CPAG 5-1200W



CPAG 22-180 UL



CAG 18 ELITE

Tile Cutters



CTC 110 PLUS



CPTC 110-1150W



CPTC 110-1350W



CTC 125 SG PLUS



CTC 125 PLUS NEW

Drill | Hammer



IMPACT DRILL CPID 013-850W FRVS



**ROTARY HAMMER** CPHD 20-500W



**ROTARY HAMMER** CPHD 26-800W



**CHIPPING HAMMER** CPCH 08-1100W



**SCREW DRIVER** CSD 010

Chopsaws



CHOPSAW MACHINE CCM 355E



**CHOPSAW MACHINE** CPCM 14-2400





CPDG 06i



**BLOWER CB1 500VS** 

Wall Sander





**CPAG 4-720W** 

#### Specifications

£	Power Input	720 Watts
60)	Speed (No Load)	12000 RPM
$\bigcirc$	Bore Diameter	16 mm
$\otimes$	Diameter Of Wheel	100 mm
	Spindle Thread	M10
	Weight	1.7 kg










#### Features & Benefits

Designed with a slim body and compact gear case for comfortable operation in tight spaces.



Innovative airflow system designed to shield against dust and damage, enhancing tool lifespan.

Industrial-grade bearings and 220° pure copper ensures better conductivity and smooth power transfer.

Designed with a compact gear case that fits tight spaces allows flexibility to grind.









**CPAG 4-750W** 

#### **Specifications**

(4)	Power Input	750 Watts
607	Speed (No Load)	11000 RPM
	Bore Diameter	16 mm
$\otimes$	Diameter Of Wheel	100 mm
	Spindle Thread	M10
	Weight	1.6 kg
	vveignt	1.6 Kg










100 mn

#### Features & Benefits

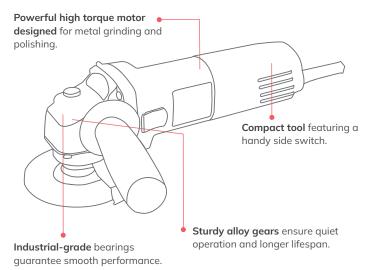









CAG 100-850W

#### **Specifications**

£	Power Input	850 Watts
€0}	Speed (No Load)	11000 RPM
$\bigcirc$	Bore Diameter	16 mm
$\otimes$	Diameter Of Wheel	100 mm
	Spindle Thread	M10
	Weight	1.7 kg










#### Features & Benefits

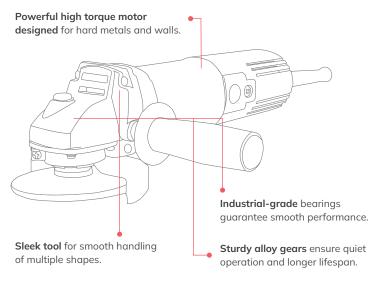













**CPAG 4-850W** 

#### Specifications

£	Power Input	850 Watts
€0}	Speed (No Load)	11000 RPM
$\bigcirc$	Bore Diameter	16 mm
$\otimes$	Diameter Of Wheel	100 mm
	Spindle Thread	M10
	Weight	1.9 kg










#### Features & Benefits

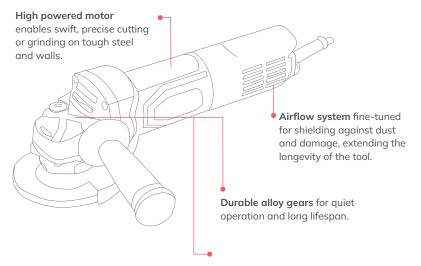

**Designed with a compact gear** case that fits tight spaces & allows flexibility to grind.













**CPAG 4-1200W** 

#### Specifications

<b>F</b>	Power Input	1200 Watts
60)	Speed (No Load)	11000 RPM
$\bigcirc$	Bore Diameter	16 mm
$\otimes$	Diameter Of Wheel	100 mm
	Spindle Thread	M10
	Weight	1.9 kg








100 mm / 110 mm (With Blade)



#### Features & Benefits

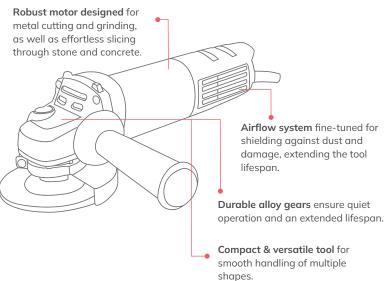















**CPAG 5-1200W** 

#### **Specifications**


T.	Power Input	1200 Watts
€0}	Speed (No Load)	11000 RPM
$\bigcirc$	Bore Diameter	16 mm
$\bigotimes$	Diameter Of Wheel	100 mm
	Spindle Thread	M14
	Weight	2.2 kg







#### Features & Benefits

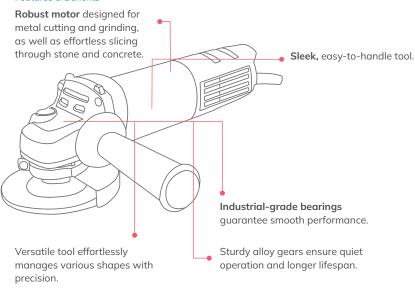















CPAG 22-180 UL

#### Specifications

£	Power Input	2200 Watts
607	Speed (No Load)	8500 RPM
	Bore Diameter	22.23 mm
$\bigotimes$	Diameter Of Wheel	180 mm
	Spindle Thread	M14
	Weight	3.8 kg










180 mm

#### Features & Benefits

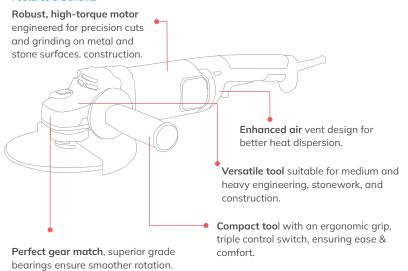











CAG 180 Elite

#### Specifications

£	Power Input	2400 Watts
€0}	Speed (No Load)	8500 RPM
$\bigcirc$	Bore Diameter	22.23 mm
$\otimes$	Diameter Of Wheel	180 mm
	Spindle Thread	M14
	Weight	5.2 kg








180 mm

#### Features & Benefits

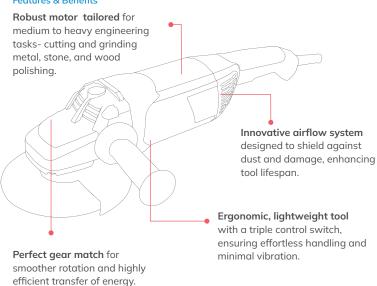











### CTC 110 Plus

#### **Specifications**

Power Input	1050 Watts
Speed (No Load)	12000 RPM
Bore Diameter	20 mm
Diameter Of Wheel	110 mm
Cutting Depth	31 mm
Weight	2.8 kg
	Speed (No Load)  Bore Diameter  Diameter Of Wheel  Cutting Depth










#### Features & Benefits

# Robust high-torque motor engineered to effortlessly cut through tiles and wood.



#### **compact**, **easy**-to-handle tool.

**Lock-on button** for continuous operation.

**Perfect machined gear** and pinion to transmit high torque.











### CPTC 110-1150 W

#### Specifications


put	1150 Watts
lo Load)	12000 RPM
meter	20 mm
r Of Wheel	110 mm
Depth	31 mm
	2.8 kg
	put lo Load) meter r Of Wheel Depth





#### Features & Benefits

Powerful high-torque motor engineered to effortlessly cut through tiles and wood.

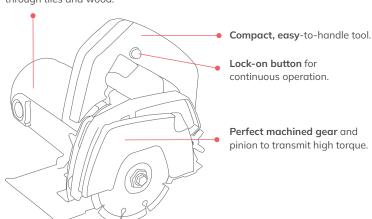











### CPTC 110-1350W

#### Specifications

Power Input	1350 Watts
Speed (No Load)	12000 RPM
Bore Diameter	20 mm
Diameter Of Wheel	110 mm
Cutting Depth	34 mm
Weight	2.9 kg
	Speed (No Load)  Bore Diameter  Diameter Of Wheel  Cutting Depth










#### Features & Benefits

Robust high-torque motor desinged to effortlessly cut hard granite up to 1" thickness in a single pass.



**Ergonomic, non-slip grip** for superior comfort and control.

**Lock-on button** facilitates one-handed operation.

Compact & versatile tool for smooth handling of multiple shapes.

**Durable alloy gears** for quiet operation and long lifespan.











### CTC 125 SG Plus

#### Specifications










#### Features & Benefits

Powerful high-torque motor engineered for precise, seamless cutting of tiles and granite.




**Ergonomic, non-slip grip** for superior comfort and control.

**Lock on button** for continuous operation.

**Perfect machined gear** and pinion for transmit high torque.

**Compact tool** tailored for effortless operation.











### CTC 125 Plus New

#### Specifications

1350 Watts
12000 RPM
20 mm
125 mm
38 mm
3 kg











#### Features & Benefits

Robust high-torque motor designed for seamless cutting on tiles and granite with utmost precision.

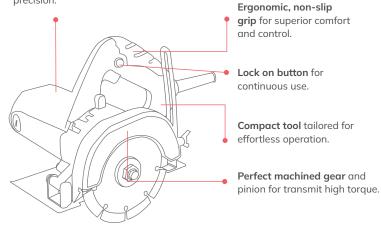












## CHOPSAW CCM 355E

#### **Specifications**


<b>F</b>	Power Input	2300 Watts
607	Speed (No Load)	3800 RPM
$\bigcirc$	Bore Diameter	25.4 mm
$\bigotimes$	Diameter Of Wheel	355 mm
	Max. Drill Diameter	
	Bar Steel	25 mm
	Pipe	100 mm
	Shaped Steel	95 x 110 mm
•	Weight	16.5 Kg

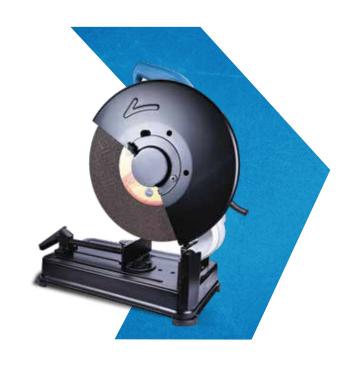





#### Features & Benefits



**Ergonomically designed** top handle and compact grip for effortless handling.

Enables quick & easy Change of wheels.

Ample internal air circulation and aluminum housing enhanced life of armature and stator.


Extra tough alloy-honed gears and industrial-quality bearings ensure low noise and smooth power transfer.









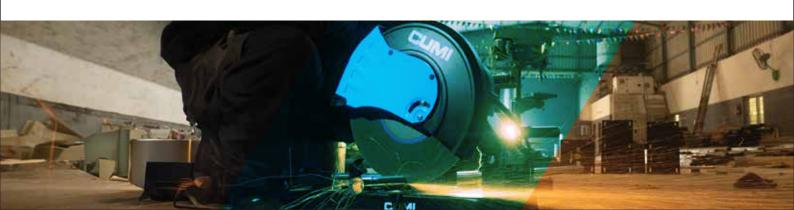




### CHOPSAW CPCM 14-2400W

#### **Specifications**

£	Power Input	2400 Watts
607	Speed (No Load)	3800 RPM
$\bigcirc$	Bore Diameter	25.4 mm
$\bigotimes$	Diameter Of Wheel	355 mm
	Max. Drill Diameter	
	Bar Steel	25 mm
	Pipe	100 mm
	Shaped Steel	95 x 110 mm
•	Weight	13.5 Kg

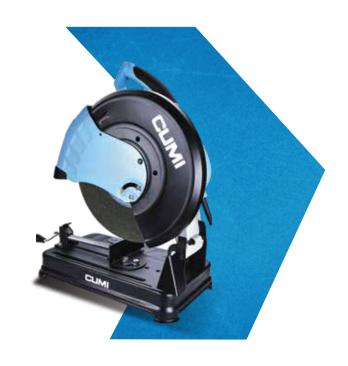






#### Features & Benefits

Robust and high-torque motor engineered for steel cutting.



**Premium bearings** for quiet operation, seamless power transfer, and better machine lifespan.

**Soft-grip handle** for better comfort.

Convenient push-and-pull lock pin for secure locking, extra protective cover for added user safety.

**Cuts effortlessly** from 0 to 45 degrees in both directions.













# **DIE GRINDER**

### 6MM-CPDG 06i

#### Specifications

<b>F</b>	Power Input	550 Watts
607	Speed (No Load)	26000 RPM
$\bigcirc$	Diameter Of Wheel	25 mm Max
$\otimes$	Collet Size	6 mm
	Weight	1.7 kg








#### Features & Benefits

**Durable motor** for improved performance and better tool lifespan.

Ideal tool for polishing, grinding, carving, shaping, and deburring wood, metal, stone, and ceramic surfaces, including grinding sharp edges and weldments.



**Protective epoxy coating shields** the stator from dust, debris, and mechanical harm.

**Ergonomic anti-slip rubber grip** for easy handling, smooth grinding, and heat insulation.









# SCREW DRIVER CSD 010


#### Specifications

<b>F</b>	Power Input	280 Watts
60)	Speed (No Load)	0-800 RPM
$\bigotimes$	Max. Drill Diameter	10 mm
	Torque	12.5 Nm
	Weight	1.2 kg





#### **Features & Benefits**




**Ergonomic design** with smooth dual-direction rotation for effortless screw insertion and removal.

Robust high-torque motor ensures smooth operation with minimal vibration and noise.

**Lock-on button** for effortless one-handed control.

**Soft grip** for better ease & comfort.













# **IMPACT DRILL**

### **CPID 013-850W FRVS**


#### **Specifications**

Power Input	850 Watts FRVS
Speed (No Load)	0-2800 RPM
Spindle Thread	½" – 20 UNF
Weight	1.9 kg





#### **Features & Benefits**

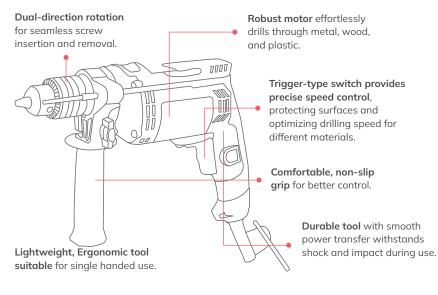











# **ROTARY HAMMER**

### **CPHD 20-500W**

#### Specifications


(F)	Power Input	500 Watts
607	Speed (No Load)	0-1100 RPM
	Max. Drill Diameter	
	Concrete	20 mm
	Steel	13 mm
	Wood	30 mm
$\bigcirc$	Max. Impact Rate	0-5000/min
	Weight	2.3 kg







#### **Features & Benefits**

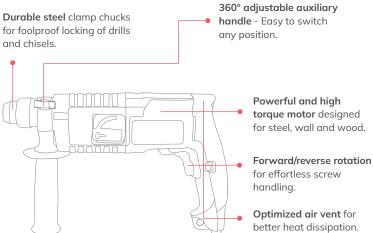











# **ROTARY HAMMER**

### **CPHD 26-800W**

#### Specifications


12 p	Power Input	800 Watts
607	Speed (No Load)	0-1300 RPM
	Max. Drill Diameter	
	Concrete	20 mm
	Steel	13 mm
	Wood	30 mm
$\bigcirc$	Max. Impact Rate	0-5500/min
	Weight	2.8 kg







#### **Features & Benefits**

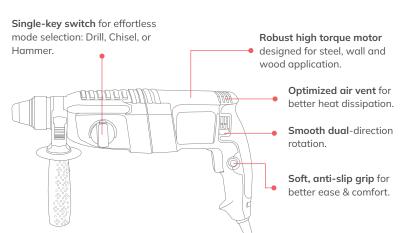











# **CHIPPING HAMMER**

CPCH 08-1100W

#### Specifications


<b>7</b>	Power Input	1100 Watts
60)	Impact Rate	3200 bpm
	Max. Impact Energy	12 J
$\otimes$	Bit Retainer	17 mm HEX Shank
	Weight	6 kg








#### Features & Benefits

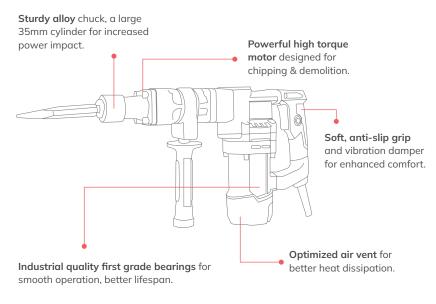

















# **BLOWER**

### **CB1 500VS**

#### **Specifications**


F	Power Input	500 Watts
की इ	Speed (No Load)	0-16000 RPM
(%) A	Air Flow	2.8 m3 / min
$\bigotimes$ $\backslash$	/ariable Speed	Yes
(i)	Dust Bag	Yes
(I)	Weight	1.8 kg








#### **Features & Benefits**

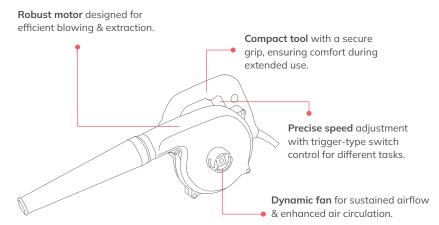

A versatile tool perfect for woodworking, computer maintenance, panel and AC cleaning, as well as tidying up your home and car interiors.













# **WALL SANDER - 7"**

### **CPWS 7-850W**

#### **Specifications**

<b>7</b>	Power Input	850 Watts
<i>τ</i> ο <i>λ</i>	Speed (No Load)	1200 - 2600 RPM
(F)	Pad Diameter	180/230 mm
	Weight	2.8 kg









#### **Features & Benefits**

